


Cartridge

308 Win - 165/168 grain

Version 9.0

NOSLER®

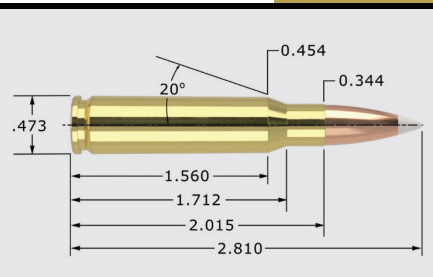

308 Win - 165/168 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.810"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	165gr. Spitzer	2.800"	0.475	0.248
Ballistic Tip®	BT	165gr. Spitzer	2.800"	0.475	0.248
Partition®	PT	165gr. Spitzer	2.770"	0.410	0.248
AccuBond® Long Range	ABLR	168gr. Spitzer	2.800"	0.525	0.253
Ballistic Tip®	BT	168gr. Spitzer	2.800"	0.490	0.253
Bonded Solid Base®	BSB	168gr. PPT	2.620"	0.350	0.253
CT® Ballistic Silvertip®	BST	168gr. Spitzer	2.800"	0.490	0.253
Custom Competition®	CC	168gr. HPBT	2.800"	0.462	0.253
Expansion Tip®	ET	168gr. Spitzer	2.750"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Reduced Drag Factor™	RDF	168gr. HPBT	2.800"	0.505	0.253

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210M
CASE HOLDS:	48.3 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AR Comp	42.5 MAX. 2694		100%
	40.5 * 2564		95%
	38.5 2433		91%
N140	44.5 MAX. 2695		** 107%
	42.5 2580		** 102%
	40.5 * 2465		98%
BL-C(2) Most Accurate Powder Tested	46.5 * MAX. 2698		98%
	44.5 2583		94%
	42.5 2468		89%
IMR 4064	44.5 * MAX. 2700		** 102%
	42.5 2630		97%
	40.5 2560		93%
IMR 4895	43.0 MAX. 2708		97%
	41.0 2560		92%
	39.0 * 2412		88%
IMR 3031	43.0 MAX. 2760		99%
	41.0 2620		94%
	39.0 * 2480		90%
IMR 4350	50.0 MAX. 2792		** 111%
	48.0 2647		** 106%
	46.0 * 2502		** 102%
RL15	44.0 * MAX. 2820		95%
	42.0 2740		91%
	40.0 2660		86%
Varget	46.0 MAX. 2826		** 103%
	44.0 * 2747		98%
	42.0 2668		94%
Big Game	52.5 MAX. 2904		** 111%
	50.5 2809		** 107%
	48.5 * 2714		** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load