


Cartridge

338 Lapua Mag - 300 grain

Version 9.0

NOSLER®

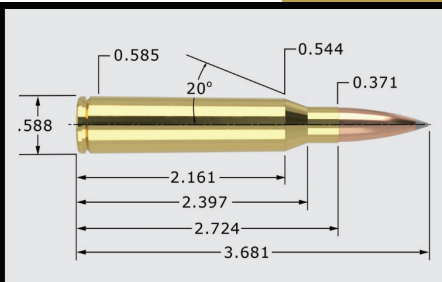

338 Lapua Mag - 300 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.681"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	300gr. Spitzer	3.650"	0.720	0.375
AccuBond® Long Range	ABLR	300gr. Spitzer	3.650"	0.785	0.375
Custom Competition®	CC	300gr. HPBT	3.650"	0.800	0.375
Reduced Drag Factor™	RDF	300gr. HPBT	3.650"	0.826	0.375

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	98.0 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7828 SSC	85.0 MAX.	2599	89%
	83.0	2537	87%
	81.0 *	2475	85%
MAGPRO	89.0 MAX.	2639	94%
	87.0 *	2579	92%
	85.0	2520	89%
US869	104.0 MAX.	2643	** 109%
	102.0	2585	** 107%
	100.0 *	2528	** 105%
N560	84.0 MAX.	2644	95%
	82.0	2587	93%
	80.0 *	2531	91%
H1000	90.0 MAX.	2647	97%
	88.0 *	2602	95%
	86.0	2558	93%
RL25	88.0 MAX.	2667	98%
	86.0	2601	95%
	84.0 *	2535	93%
Magnum	91.0 MAX.	2681	94%
	89.0 *	2634	92%
	87.0	2587	90%
Retumbo	94.0 MAX.	2729	** 103%
	92.0	2669	** 101%
	90.0 *	2608	99%
Norma 217	92.0 MAX.	2732	** 105%
	90.0	2681	** 103%
	88.0 *	2630	** 101%
RL33	98.0 MAX.	2751	** 102%
Most Accurate	96.0	2697	100%
Powder Tested	94.0 *	2644	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load