


Cartridge

308 Win - 175/180 grain

Version 9.0

NOSLER®

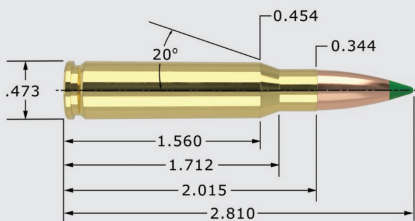

308 Win - 175/180 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.810"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	175gr. HPBT	2.800"	0.505	0.264
Reduced Drag Factor™	RDF	175gr. HPBT	2.800"	0.536	0.264
AccuBond®	AB	180gr. Spitzer	2.800"	0.507	0.271
Ballistic Tip®	BT	180gr. Spitzer	2.800"	0.507	0.271
CT® Ballistic Silvertip®	BST	180gr. Spitzer	2.800"	0.507	0.271
Expansion Tip®	ET	180gr. Spitzer	2.750"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	180gr. PPT	2.740"	0.361	0.271
Partition®	PT	180gr. Spitzer	2.770"	0.474	0.271

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	48.6 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AR Comp	41.0 MAX. 2535		96%
	39.0 2421		91%
	37.0 * 2306		87%
IMR 8208 XBR	42.0 MAX. 2566		95%
	40.0 2468		90%
	38.0 * 2371		86%
IMR 4895 Most Accurate Powder Tested	41.5 MAX. 2568		93%
	39.5 * 2444		88%
	37.5 2320		84%
IMR 4064	43.0 MAX. 2597		98%
	41.0 2444		93%
	39.0 * 2291		89%
Varget	43.5 * MAX. 2599		97%
	41.5 2475		92%
	39.5 2351		88%
AA 2520	43.5 * MAX. 2612		92%
	41.5 2524		88%
	39.5 2437		84%
W748	44.0 * MAX. 2614		94%
	42.0 2502		90%
	40.0 2390		86%
RL15	44.0 * MAX. 2617		94%
	42.0 2480		90%
	40.0 2342		86%
W760	48.0 MAX. 2620		** 103%
	46.0 * 2518		99%
	44.0 2415		95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load